


High Performance Nickel - Copper Alloy 400 (Monel) Washer

Exceptional strength plus heat and corrosion resistance make these washers suitable for use in chemical and electrical equipment as well as in salt water. Not rated for Rockwell hardness.

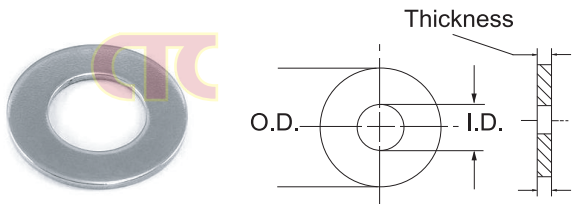


Screw Size	ID	OD	Thick.,Min.-Max	Pkg. Qty.	Number	Price ₪
1/4"	0.265"	11/16"	0.046" - 0.054"	10	9A07 8029	—
5/16"	0.343"	3/4"	0.046" - 0.054"	5	9A07 8030	—
3/8"	0.390"	1"	0.055" - 0.067"	5	9A07 8031	—
1/2"	0.562"	1 1/4"	0.070" - 0.082"	1	9A07 8033	—
5/8"	0.687"	1 1/2"	0.070" - 0.082"	1	9A07 8035	—
3/4"	0.812"	1 3/4"	0.090" - 0.115"	1	9A07 8036	—

Electrically Conductive Copper Washer

When you need exceptional electrical conductivity use these alloy 110 copper washers.


Not rated for rockwell hardness.

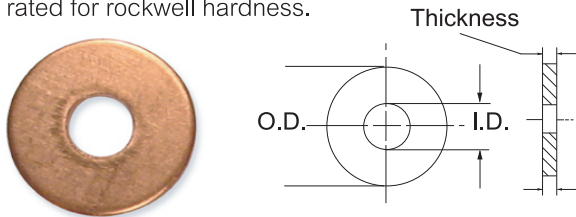

Screw Size	ID	OD	Thick.,Min.-Max	Pkg. Qty.	Number	Price ₪
10	0.203"	1/2"	0.033" - 0.047"	50	9A37 4120	—
1/4"	0.260"	5/8"	0.052" - 0.072"	50	9A37 4130	—
5/16"	0.343"	3/4"	0.052" - 0.072"	25	9A37 4140	—
3/8"	0.390"	1"	0.052" - 0.072"	25	9A37 4160	—
7/16"	0.500"	1 1/8"	0.068" - 0.088"	10	9A37 4170	—
1/2"	0.562"	1 3/8"	0.068" - 0.088"	10	9A37 4180	—
5/8"	0.687"	1 3/4"	0.083" - 0.103"	5	9A37 4190	—
3/4"	0.812"	2"	0.083" - 0.103"	1	9A37 4210	—

High Strength to Weight Titanium Washer


Made of pure titanium these washers offer corrosion resistance that's superior to 18-8 and Type 316 stainless steel but have comparable strength. They're also inert to salt and sulfuric acid have a high strength to weight ratio and withstand high temperatures. Rockwell hardness is B80.

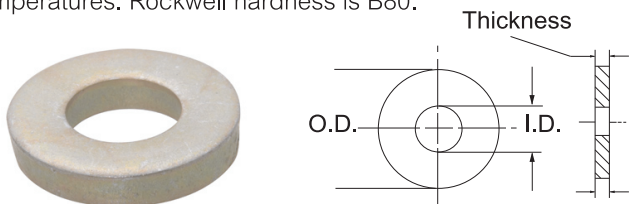

Screw Size	ID	OD	Thick.,Min.-Max.	Pkg. Qty.	Number	Price ₪
6	9/64"	1/2"	0.036" - 0.044"	5	9A40 5208	—
8	3/16"	5/8"	0.036" - 0.044"	5	9A40 5209	—
10	13/64"	3/4"	0.036" - 0.044"	5	9A40 5210	—
1/4"	17/64"	3/4"	0.036" - 0.044"	1	9A40 5220	—
5/16"	11/32"	1"	0.045" - 0.055"	1	9A40 5229	—
3/8"	13/32"	1"	0.057" - 0.069"	1	9A40 5230	—

Metric Nylon 6/6 Washer

Great for insulating reducing friction and minimizing wear between parts. Nylon absorbs environmental moisture which affects dimensions and physical properties. Max. temperature is 82°C. Color is off-white.

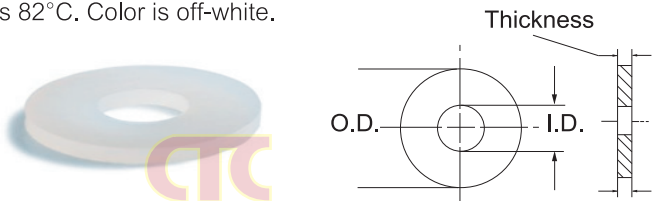

Screw Size	ID, mm	OD, mm	Thick., Min.-Max., mm	Pkg. Qty.	Number	Price ₪
M2	2.15	5	0.670-0.930	100	9A56 1110	—
M3	3.2	8	0.670-0.930	100	9A56 1130	—
M4	4.3	9	0.670-0.930	100	9A56 1150	—
M5	5.3	11	0.870-1.130	100	9A56 1160	—
M6	6.4	12	1.370-1.630	100	9A56 1170	—
M8	8.4	18	1.870-2.130	100	9A56 1180	—
M10	10.5	22	2.370-2.630	100	9A56 1200	—
M12	13.43	25.14	2.400-2.660	100	9A56 1220	—
M16	17.0	30	2.870-3.130	10	9A56 1240	—

Metric Brass Washer - DIN 125A

Screw Size	ID, mm	OD, mm	Thick., Min.-Max., mm	Pkg. Qty.	Number	Price ₪
M3	3.2	7.0	0.45-0.55	100	9A16 3190	—
M4	4.3	9.0	0.7-0.9	100	9A16 3210	—
M5	5.3	10.0	0.9-1.1	100	9A16 3230	—
M6	6.4	12.0	1.4-1.8	100	9A16 3240	—
M8	8.4	16.0	1.4-1.8	50	9A16 3260	—
M10	10.5	20.0	1.8-2.2	25	9A16 3270	—
M12	13.0	24.0	2.3-2.7	25	9A16 3280	—
M14	15.0	28.0	2.3-2.7	10	9A16 3300	—
M16	17.0	30.0	2.7-3.3	10	9A16 3310	—



Softer than steel these brass washers are corrosion resistant and may be slightly magnetic. Not rated for rockwell hardness.

