


# Flexible Hoses

## PU Flexible Hose

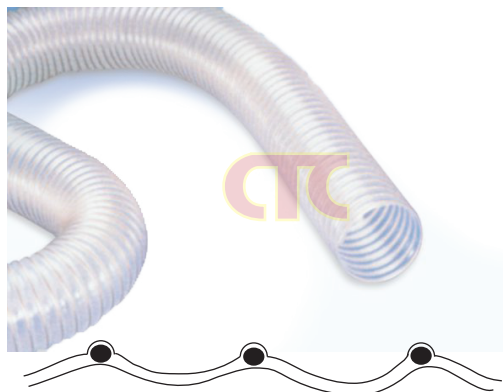

### Construction

Spring steel wire integrated in wall.

Wall thickness 0.4 mm approx.

### Material

Wall : Ester-Polyurethane

spiral : Spring steel wire

### Temperature Range

-40° C Approx to +90° C Approx.

Short time to +125° C Approx.

The Vacuum system. Transport food. The Product is a powder of the 15 m /EA.

**Applications** - For Abrasive solids such as Dust, Powder, Fibres and Chips. For Gaseous media such as oil vapors and welding smoke. For De-Dusting and Suction plants.

Number	Price ฿	ID (mm)	OD (mm)	Pressure Bar	Vacuum Bar	Radius (mm)	Weight (kg/m)	Length (m)
678P 6510	—	25	32	1.300	0.340	32	0.14	15
678P 6511	—	32	39	1.100	0.320	39	0.17	15
678P 6512	—	38	46	0.900	0.300	46	0.19	15
678P 6513	—	50	58	0.700	0.240	58	0.27	15
678P 6514	—	63	71	0.550	0.180	71	0.34	15
678P 6515	—	76	84	0.470	0.130	84	0.44	15
678P 6516	—	80	88	0.430	0.120	88	0.47	15
678P 6517	—	90	98	0.390	0.100	98	0.49	15
678P 6518	—	100	108	0.350	0.080	108	0.52	15
678P 6519	—	114	122	0.300	0.070	122	0.59	15
678P 6520	—	120	128	0.290	0.070	128	0.62	15
678P 6521	—	125	133	0.280	0.060	133	0.64	15
678P 6522	—	140	148	0.250	0.050	148	0.72	15
678P 6523	—	150	158	0.170	0.050	158	0.76	15
678P 6524	—	160	168	0.160	0.040	168	0.81	15
678P 6525	—	178	186	0.140	0.040	186	0.89	15
678P 6526	—	203	211	0.130	0.030	211	1.10	15
678P 6527	—	254	262	0.100	0.015	262	1.30	10

## Silicone Hose 2 Ply

2 Ply - Silicone coated glass fibre fabric.

Embedded broze plate steel wire helix. Twin outer glass cord, Light, Link resistant. Low air friction loss properties due to additional inner layer. Always smooth bore also in tight bends. Good application in low pressure range.

**Colour** : Orange

### Temperature :

-80°C to 310°C.



Number	Price ฿	Dia. Inside (mm)	Dia. Outside (mm)	Pressure Bar	Vacuum (mm WS/mm)	Weight (g/m)	Length (m)
778P 6510	—	19	21.6	2.5	7000	105	4
778P 6511	—	22	25.2	2.5	7000	130	4
778P 6512	—	25	28.2	2.5	7000	145	4
778P 6513	—	32	35.2	2.5	5800	180	4
778P 6514	—	38	41.2	2.4	5800	210	4
778P 6515	—	41	44.2	2.4	5800	238	4
778P 6516	—	44	47.2	2.4	5800	255	4
778P 6517	—	51	54.74	2.4	5300	285	4
778P 6518	—	57	60.74	2.3	5300	330	4
778P 6519	—	63	66.74	2.2	4600	355	4
778P 6520	—	70	73.74	2.2	4600	435	4
778P 6521	—	76	79.74	2.1	4400	470	4
778P 6522	—	83	86.74	2.1	4000	510	4
778P 6523	—	89	92.74	2.1	4000	545	4
778P 6524	—	95	98.74	2.0	4000	570	4
778P 6525	—	102	106.2	1.8	3500	610	4

## Duct Hose - PP

**Feature** : This item is NON-PVC Product. It can be used at oil smoke area. Length could be adjustable about 1.5 times from standard length. It is easy for cut connection from changing of duct diameter. It can be used at 80°C Air. Continuous usage is allowed below 80°C.

Number	Price ฿	Designation (mm)	ID (mm)	OD (mm)	Weight (kg/m)	Radius Of Curvature (mm)	Packing Unit (m/Roll)
58E1 1110	—	55	55.0±0.8	62.0±1.0	470±2%	120	10
58E1 1111	—	65	65.0±0.8	72.0±1.0	560±2%	140	10
58E1 1112	—	75	75.0±0.8	82.0±1.0	640±2%	165	10
58E1 1113	—	100	100.0±0.8	107.0±1.0	850±2%	220	10
58E1 1114	—	125	125.0±0.8	132.0±1.0	1,070±2%	325	10
58E1 1115	—	150	150.0±1.5	157.0±1.5	1,280±2%	375	10

