

Light Curtain, Accessories

MiniSafe Safety Light Curtain - MS4800 Series

- Resolutions : 14 mm (0.55 In.), 20 mm (0.79 In.), 30 mm (1.18 In.) and 40 mm (1.57 In.).
- Ranges : 7 m (23 Ft.) for 14 mm Resolution systems and 20 m (65 Ft.) for 20, 30 and 40 mm Resolution systems.
- Protected Heights : 280 to 1800 mm (11 to 70 In.) for 14 and 20 mm Resolution Systems; 280 to 2120 mm (11 to 83 In.) for 30 mm Resolution systems and 360 to 2040 mm (14 to 80.3 In.) for 40 mm Resolution systems.
- Compact Size : 50 × 38 mm (2 × 1.5 In.), "Two-Box" Design - No separate control box; No cable between transmitter and Receiver. Individual beam indicators. Quick and Easy fixed blanking programming option "SB1".

Light Curtain Unit


Number	Price ฿	Mfr's	Coverage Height mm. (In.)
48N0 7001	---	MS4800S-20-0320	320 (12.6)
48N0 7002	---	MS4800S-20-0440	440 (17.3)
48N0 7003	---	MS4800S-20-0600	600 (23.6)
48N0 7004	---	MS4800S-20-0760	760 (29.9)
48N0 7005	---	MS4800S-20-0920	920 (36.2)
48N0 7006	---	MS4800S-20-1080	1080 (42.5)
48N0 7007	---	MS4800S-20-1200	1200 (47.2)
48N0 7008	---	MS4800S-30-0440	440 (17.3)
48N0 7009	---	MS4800S-30-0600	600 (23.6)
48N0 7010	---	MS4800S-30-0720	720 (28.3)
48N0 7011	---	MS4800S-30-0760	760 (29.9)
48N0 7012	---	MS4800S-30-0840	840 (33.0)
48N0 7013	---	MS4800S-30-0920	920 (36.2)
48N0 7014	---	MS4800S-30-1040	1040 (41.0)
48N0 7015	---	MS4800S-30-1200	1200 (47.2)
48N0 7016	---	MS4800S-30-1400	1400 (55.1)
48N0 7017	---	MS4800S-30-1520	1520 (59.8)

STI



Cable

Number	Price ฿	Mfr's	Description
99N0 7001	---	MS4800-CBLRX-10M	MS4800 Receiver Cable, 10 Meter (32.8 Ft.)
99N0 7002	---	MS4800-CBLRX-15M	MS4800 Receiver Cable, 15 Meter (49.2 Ft.)
99N0 7003	---	MS4800-CBLRX-30M	MS4800 Receiver Cable, 30 Meter (98.5 Ft.)
99N0 7004	---	MS4800-CBLTX-10M	MS4800 Transmitter Cable, 10 Meter (32.8 Ft.)
99N0 7005	---	MS4800-CBLTX-15M	MS4800 Transmitter Cable 15 Meter (49.2 Ft.)
99N0 7006	---	MS4800-CBLTX-30M	MS4800 Transmitter Cable, 30 Meter (98.5 Ft.)

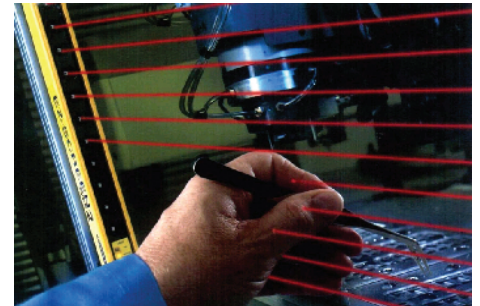

Perimeter Access Guarding - PA4600 Series

The Perimeter Access PA4600 is a long-range, multibeam safeguarding device. It is suited to detect the torsos of personnel entering a hazardous area. Installation and alignment is simplified with Individual Beam Indicators, which glow red when the beam is out of alignment or blocked.

The separate Scan Codes allow the installer to select unique scan frequencies that eliminate cross-talk with adjacent PA4600 systems. Diagnostics are greatly streamlined with the LED status indicators and numeric displays.

Number	Price ฿	Mfr's	Description
51H2 0701	---	PA46-1-000-Q2-NO1-PN	PA4600 with 1 Beam
51H2 0702	---	PA46-2-600-Q2-NO1-PN	PA4600 with 2 Beams with 600 mm Spacing
51H2 0703	---	PA46-3-400-Q2-NO1-PN	PA4600 with 3 Beams with 400 mm Spacing
51H2 0704	---	PA46-BB-2-500	PA4600-BB with 2 Beams with 500 mm Spacing
51H2 0705	---	PA46-BB-2-600	PA4600-BB with 2 Beams with 600 mm Spacing
51H2 0706	---	CBL-LCTX-10M	PA4600 Transmitter Cable, 10 m (32.8 Ft.)
51H2 0707	---	CBL-LCTX-15M	PA4600 Transmitter Cable, 15 m (49.3 Ft.)
51H2 0708	---	CBL-LCTX-30M	PA4600 Transmitter Cable, 30 m (98.5 Ft.)
51H2 0709	---	CBL-LCRX-10M	PA4600 Receiver Cable, 10 m (32.8 Ft.)
51H2 0710	---	CBL-LCRX-15M	PA4600 Receiver Cable, 15 m (49.3 Ft.)
51H2 0711	---	CBL-LCRX-30M	PA4600 Receiver Cable, 30 m (98.5 Ft.)



- Operating range of 70 m,
- 1 to 6 Beams available.
- Compact Size : 46 × 55 mm (1.81 × 2.17 In.).
- Simple "Two-Box" Design : No separate control box required.
- Individual beam indicators.