



Relays & Reed Relays

Relays - RU Series

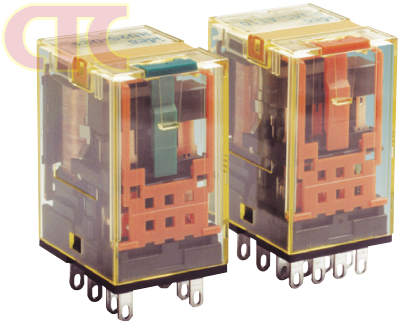


- ▶ Non-Polarized green LED indicator.
- ▶ Solder-free construction (Lead-Free).
- ▶ No internal wires.
- ▶ Mechanical flag indicator.
- ▶ Manual latching lever with color coding for AC or DC Coil.
- ▶ Snap-On marking plate. **IDEC**
- ▶ Cadmium-free contacts.
- ▶ Contact rating : 6 A, 4PDT; 10 A, DPDT.

RU2 Dimensions

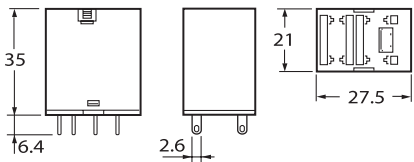

RU4 Dimensions

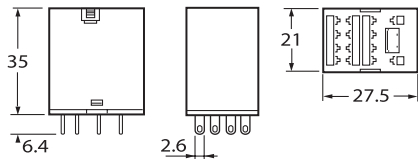

Number	Price ฿	Mfr's Type	Coil Voltage	Contact		Check Button
				Rating	Form	
8Z14 1000	---	RU2S-A24	24 VAC	10 A	DPDT	Latching
8Z14 1004	---	RU2S-A110	110-120 VAC	10 A	DPDT	Latching
8Z14 1013	---	RU2S-A220	220-240 VAC	10 A	DPDT	Latching
8Z14 1014	---	RU2S-D12	12 VDC	10 A	DPDT	Latching
8Z14 1015	---	RU2S-D24	24 VDC	10 A	DPDT	Latching
8Z14 1016	---	RU2S-D110	110 VDC	10 A	DPDT	Latching
8Z14 1026	---	RU4S-A24	24 VAC	6 A	4PDT	Latching
8Z14 1030	---	RU4S-A110	110-120 VAC	6 A	4PDT	Latching
8Z14 1033	---	RU4S-A220	220-240 VAC	6 A	4PDT	Latching
8Z14 1034	---	RU4S-D12	12 VDC	6 A	4PDT	Latching
8Z14 1044	---	RU4S-D24	24 VDC	6 A	4PDT	Latching
8Z14 1050	---	RU4S-D110	110 VDC	6 A	4PDT	Latching
8Z14 0062	---	RU2S-C-A110	110-120 VAC	10 A	DPDT	No
8Z14 0063	---	RU2S-C-A220	220-240 VAC	10 A	DPDT	No
8Z14 0064	---	RU2S-C-D12	12 VDC	10 A	DPDT	No
8Z14 0065	---	RU2S-C-D24	24 VDC	10 A	DPDT	No
8Z14 0066	---	RU2S-C-D110	110 VDC	10 A	DPDT	No
8Z14 0068	---	RU4S-C-A24	24 VAC	6 A	4PDT	No
8Z14 0069	---	RU4S-C-A110	110-120 VAC	6 A	4PDT	No
8Z14 0070	---	RU4S-C-A220	220-240 VAC	6 A	4PDT	No
8Z14 0071	---	RU4S-C-D12	12 VDC	6 A	4PDT	No
8Z14 0072	---	RU4S-C-D24	24 VDC	6 A	4PDT	No
8Z14 0073	---	RU4S-C-D110	110 VDC	6A	4PDT	No
8Z14 0224	---	RU2S-M-A110	110-120 VAC	10 A	DPDT	Momentary
8Z14 0226	---	RU2S-M-D12	12 VDC	10 A	DPDT	Momentary
8Z14 0227	---	RU2S-M-D24	24 VDC	10 A	DPDT	Momentary
8Z14 0229	---	RU4S-M-A24	24 VAC	6 A	4PDT	Momentary
8Z14 0230	---	RU4S-M-A110	110-120 VAC	6 A	4PDT	Momentary
8Z14 0231	---	RU4S-M-A220	220-240 VAC	6 A	4PDT	Momentary
8Z14 0232	---	RU4S-M-D12	12 VDC	6 A	4PDT	Momentary
8Z14 0233	---	RU4S-M-D24	24 VDC	6 A	4PDT	Momentary
8Z14 0234	---	RU4S-M-D110	110 VDC	6 A	4PDT	Momentary

Sockets For RU Series Relays

Number	Price ฿	Mfr's	Description	For Use with Series
8T14 1054	---	SM2S-05	DIN Mount, Screw terminals	RU2
8T14 1055	---	SM2S-05C	DIN Mount, Finger-Safe screw terminals	RU2
8T14 3022	---	SY4S-05	DIN Mount, Screw terminals	RU4
8T14 1056	---	SY4S-05C	DIN Mount, Finger-Safe screw terminals	RU4
8T14 3020	---	SY4S-51	Through panel mount, Blade terminals	RU2, RU4
8T14 1085	---	SY4S-61	PCB Mount	RU2, RU4
8T14 3021	---	SY4S-62	PCB Mount	RU2, RU4
8T14 0040	---	SU4S-11L	DIN Mount, Spring clamp terminals	RU4
8T14 0043	---	SU2S-11L	DIN Mount, Spring clamp terminals	RU2

Microminiature Reed Relays

Microminiature reed relays occupy only 0.17" (4.32) square of PC board space and provide improved system to lock-in terminal pins. Type 2200-2301 and -2302 are engineered to meet automatic test equipment specifications. Capable of 5ms must-operate time, 500 x 10 life expectancy. Type 2200-2302 has a coaxial shield, while 2200-2301 has an electrostatic shield. The 2200 and 2204 series have a switching voltage of 200V and contact rating of 10W. The 2211 Series has a switching voltage of 100V and contact rating of 3W.

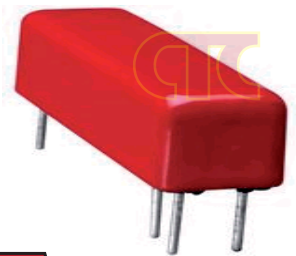


Fig.	Number	Price ฿	Mfr's Type	Contact	Nom. Coil Voltage
4	5E29 7540	---	2200 2301	1 Form A	5VDC
1	5E29 7541	---	2200 2302	1 Form A	5VDC
2	5E29 7542	---	2204-05-411	1 Form A	5VDC
2	5E29 7543	---	2204-12-301	1 Form A	5VDC
2	5E29 7544	---	2204-12-311	1 Form A	5VDC
3	5E29 7545	---	2211-05-300	1 Form C	12VDC
3	5E29 7546	---	2211 05 301	1 Form C	12VDC
3	5E29 7547	---	2211-12-301	1 Form C	12VDC

