


Electrical Terminals

Vinyl and Non - Insulated Pin Terminals (Butted)



A.W.G. 26, 24, 22, 20, 18, 16, 14, 12, 10, 8, 6, 4, 2
AMP. 5.5, 7, 9, 12, 17, 18, 30, 35, 50, 70, 95, 125, 170

Maximum Electrical Rating : 105°C 600 Volts Max.
Insulation Material : Vinyl, Copper



Color Code


Yellow 26-22 Red 22-16
Blue 16-14 Yellow 12-10

| Wire Range A.W.G. mm ² | Butted Seam | | | | | | Dimension (mm) | | | Qty. |
|-----------------------------------------|---------------------|------------|----------|-------------------------|------------|----------|-------------------|-----|-----|------|
| | Insulated Terminals | | | Non-Insulated Terminals | | | E | W | d1 | |
| | Number | Price ฿ | Mfr's | Number | Price ฿ | Mfr's | | | | |
| 26-22 A.W.G. 0.2-0.5 mm ² | 54K1 2018 | — | PTV0.5-9 | 64K1 2018 | — | PTN0.5-9 | 8 | 1.4 | 1 | 100 |
| 22-16 A.W.G. 0.5-1.5 mm ² | 54K1 2019 | — | PTV1-9 | 64K1 2019 | — | PTN1-9 | 10 | 1.9 | 1.7 | 100 |
| | 54K1 2020 | — | PTV1-12 | 64K1 2020 | — | PTV1-12 | 10 | 1.9 | 1.7 | 100 |
| | 54K1 2021 | — | PTV1-14 | 64K1 2021 | — | PTN1-14 | 10 | 1.9 | 1.7 | 100 |
| 16-14 A.W.G. 1.5-2.5 mm ² | 54K1 2022 | — | PTV2-10 | 64K1 2022 | — | PTN2-10 | 10 | 1.9 | 2.3 | 100 |
| | 54K1 2023 | — | PTV2-12 | 64K1 2023 | — | PTN2-12 | 10 | 1.9 | 2.3 | 100 |
| | 54K1 2024 | — | PTV2-16 | 64K1 2024 | — | PTN2-16 | 10 | 1.9 | 2.3 | 100 |
| 12-10 A.W.G. 4-6 mm ² | 54K1 2025 | — | PTV5-13 | 64K1 2025 | — | PTN5-13 | 13 | 1.9 | 3.4 | 100 |

Vinyl and Non - Insulated Multiple Stud Ring Terminals (Butted)



A.W.G. 22, 20, 18, 16, 14, 12, 10
AMP. 9, 12, 17, 18, 30, 35, 50

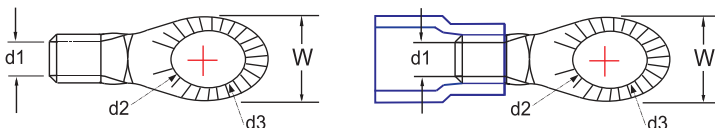

Please Specify Screw (d3-d2) When Ordered.

Maximum Electrical Rating : 105°C 600 Volts Max.
Insulation Material : Vinyl, Copper

Color Code

Red 22-16 Blue 16-14 Yellow 12-10

| Wire Range A.W.G. mm ² | Insulated Terminals | | | Non-Insulated Terminals | | | Screw (d3-d2) | | Dimension (mm) | | Qty. |
|------------------------------------------|---------------------|------------|-------------|-------------------------|------------|-------------|------------------|----------------|-------------------|-----|------|
| | Number | Price ฿ | Mfr's | Number | Price ฿ | Mfr's | In. | mm | W | d1 | |
| | | | | | | | | | | | |
| 22 -16 A.W.G. 0.5-1.5 mm ² | 128E 1837 | — | MSRV1-3753 | 228E 1837 | — | MSRN1-3753 | #6 #8 #10 | M3 M4 M5 | 8.6 | 1.7 | 100 |
| 16 -14 A.W.G. 1.5-2.5 mm ² | 128E 1838 | — | MSRV2-3753 | 228E 1838 | — | MSRN2-3753 | | | 8.6 | 2.3 | 100 |
| 12-10 A.W.G 4-6 mm ² | 128E 1839 | — | MSRVB5-3753 | 228E 1839 | — | MSRNB5-3753 | | | 9.9 | 3.4 | 100 |