

Lightings

Low Profile Wall Mount LED Signal Light - WE/WEP Series


Ultra-Slim profile (37.5 mm) unit is designed to smoothly integrate with your equipment. All new light design uses "Side Projection" (Pat. Pend.) LEDs and "Super Clear" lenses. Available in two finishes, Cream (WEP) and chrome-plated (WE). IP-65 Rating (IP-54 for FB Version) for washdown and cleanroom environments. FB Version features a flashing circuit and two selectable intermittent single-tone audible alarms (90 dB at 1 m). Open-Collector compatibility allows direct drive via a PLC. Available in 3-, 4- or 5-Tier Styles in 24 VAC/VDC. CE Compliant and UL, C-UL component recognized.

Number	Price ฿	Mfr's	Mounting	Rated Voltage	Color *
3 Lights					
3T52 0201	---	WE-302FB-RYG	Wall	24 VAC/VDC	R/Y/G
3T52 0198	---	WE-302-RYG	Wall	24 VAC/VDC	R/Y/G
3T52 0207	---	WEP-302FB-RYG	Wall	24 VAC/VDC	R/Y/G
3T52 0204	---	WEP-302-RYG	Wall	24 VAC/VDC	R/Y/G
4 Lights					
3T52 0202	---	WE-402FB-RYGB	Wall	24 VAC/VDC	R/Y/G/B
3T52 0199	---	WE-402-RYGB	Wall	24 VAC/VDC	R/Y/G/B
3T52 0208	---	WEP-402FB-RYGB	Wall	24 VAC/VDC	R/Y/G/B
3T52 0205	---	WEP-402-RYGB	Wall	24 VAC/VDC	R/Y/G/B
5 Lights					
3T52 0203	---	WE-502FB-RYGB/C	Wall	24 VAC/VDC	R/Y/G/B/C
3T52 0200	---	WE-502-RYGB/C	Wall	24 VAC/VDC	R/Y/G/B/C
3T52 0209	---	WEP-502FB-RYGB/C	Wall	24 VAC/VDC	R/Y/G/B/C
3T52 0206	---	WEP-502-RYGB/C	Wall	24 VAC/VDC	R/Y/G/B/C

* R = Red, Y = Yellow, G = Green, B = Blue, C = Clear.

Wall mount LED	
WE, WEP	Continuous light
WE-FB, WEP-FB	Continuous or flashing Light with audible alarm

PATLITE

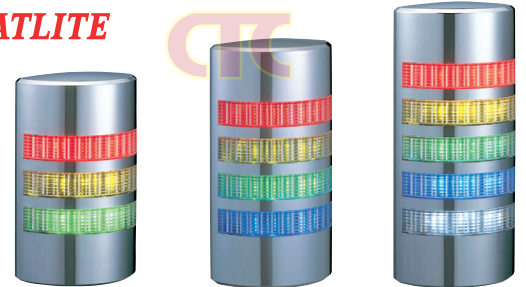

WE/WEP-302

WE/WEP-402

WE/WEP-502

LED Silver - Color Signal Tower with 10 Ft. Cable - LME U Series

PATLITE



LME-102U LME-202U LME-302U LME-402U LME-502U

Size : 60 mm (2.57") Diameter. Comes with 3 meter (10 Foot) sleeved cable. Voltage : 24 VAC/VDC, LED Modules are interchangeable and stackable after purchase (Up to 5 LED Modules) CE Compliant and UL, C-UL Component recognized. IP-65 Rated and NEMA Rated 4, 4X and 13. Pre-wired and Pre-assembled for easy ordering and installation. NPN and PNP Open collector compatible. FB Types include two selectable, single-tone intermittent alarms with adjustable volume to 90 dB (at 1 m) and flashing function. Pole mount versions include 300 mm (11 3/4"). Aluminum pole and circular mounting bracket with mounting screws and flange nuts. Optional mounting brackets available.

Direct Mount		Pole Mount	
LME-UW	Continuous light	LME-U	Continuous light
LME-UFBW	Continuous or flashing light with audible alarm	LME-UFB	Continuous or flashing light with audible alarm

Number	Price ฿	Mfr's	Mounting	Rated Voltage	Color *
1 Light					
3T52 0171	---	LME-102UFB-R	Pole	24 VAC/VDC	R
3T52 0183	---	LME-102UFBW-R	Direct	24 VAC/VDC	R
3T52 0165	---	LME-102U-R	Pole	24 VAC/VDC	R
3T52 0177	---	LME-102UW-R	Direct	24 VAC/VDC	R
2 Lights					
3T52 0173	---	LME-202UFB-RG	Pole	24 VAC/VDC	R/G
3T52 0172	---	LME-202UFB-RY	Pole	24 VAC/VDC	R/Y
3T52 0185	---	LME-202UFBW-RG	Direct	24 VAC/VDC	R/G
3T52 0184	---	LME-202UFBW-RY	Direct	24 VAC/VDC	R/Y
3T52 0167	---	LME-202U-RG	Pole	24 VAC/VDC	R/G
3T52 0166	---	LME-202U-RY	Pole	24 VAC/VDC	R/Y
3T52 0179	---	LME-202UW-RG	Direct	24 VAC/VDC	R/G
3T52 0178	---	LME-202UW-RY	Direct	24 VAC/VDC	R/Y
3 Lights					
3T52 0174	---	LME-302UFB-RYG	Pole	24 VAC/VDC	R/Y/G
3T52 0186	---	LME-302UFBW-RYG	Direct	24 VAC/VDC	R/Y/G
3T52 0168	---	LME-302U-RYG	Pole	24 VAC/VDC	R/Y/G
3T52 0180	---	LME-302UW-RYG	Direct	24 VAC/VDC	R/Y/G
4 Lights					
3T52 0175	---	LME-402UFB-RYGB	Pole	24 VAC/VDC	R/Y/G/B
3T52 0187	---	LME-402UFBW-RYGB	Direct	24 VAC/VDC	R/Y/G/B
3T52 0169	---	LME-402U-RYGB	Pole	24 VAC/VDC	R/Y/G/B
3T52 0181	---	LME-402UW-RYGB	Direct	24 VAC/VDC	R/Y/G/B
5 Lights					
3T52 0176	---	LME-502UFB-RYGB/C	Pole	24 VAC/VDC	R/Y/G/B/C
3T52 0188	---	LME-502UFBW-RYGB/C	Direct	24 VAC/VDC	R/Y/G/B/C
3T52 0170	---	LME-502U-RYGB/C	Pole	24 VAC/VDC	R/Y/G/B/C
3T52 0182	---	LME-502UW-RYGB/C	Direct	24 VAC/VDC	R/Y/G/B/C

* R = Red, Y = Yellow, G = Green, B = Blue, C = Clear.