

Safety Respirator & Electrical Tape

Particulate Respirators

High - Quality particulate respirators provide comfortable, reliable worker protection in a wide variety of industrial applications. All particulate respirators are lightweight and come with adjustable noseclips for greater comfort and a secure seal. Order no. 4H90 8038 provides protection against non-oil based aerosol particles. Order no. 3M10 7905, 3M10 7906, 8H80 4271, 3M10 7908, 0J90 4497, 3M10 7909 feature 3M™'s patented one-way Cool Flow™ exhalation valve which offers easy exhalation for cool/dry comfort in work settings that involve heat, humidity, or long periods of wear.

Order no. 6J40 8940, 3M10 7909 feature an innovative, 3-panel design that offers a low-profile for better visibility and conformability to a wide range of face sizes.

Order no. 8H80 4271 N100 particulate respirator is well suited for those who want NIOSH's highest rated filtration efficiency. It provides a minimum filter efficiency of 99.97% against non-oil based particles. Other styles available depending on conditions of use; contact sales.



4H90 8038



3M10 7908


3M



6J40 8940

Number	Price (Pkg.) ₪	Pkg. of	Mfr's	Description
4H90 8038	—	20	8210-RESPIRATOR	N95 Particulate respirator for dusty operations
9K30 5663	—	20	8210 PLUS	N95 Particulate respirator for dusty operations with braided headstrap
3M10 7908	—	10	8511	N95 Particulate respirator with cool flow exhalation valve for hot/Dusty operations
0J90 4497	—	10	8515	N95 Particulate Welding respirator with cool flow exhalation Valve for Welding/Soldering and hot/Dusty operations
3M10 7905	—	10	8212	N95 Particulate welding respirator with face seal and cool flow exhalation valve for welding/Soldering and Hot/Dusty operations
6J40 8940	—	20	9210	N95 Particulate respirator with 3-Panel design for dusty operations
3M10 7909	—	10	9211	N95 Particulate respirator with 3-Panel design and cool flow exhalation valve for hot/Dusty operations
3M10 7906	—	10	8214	N95 Particulate welding respirator with face seal, cool flow exhalation valve and Nuisance level organic vapor relief
3M10 7907	—	20	8247	R95 Particulate respirator with nuisance level organic vapor relief
8H80 4271	—	1	8233	N100 Particulate respirator with face seal and cool flow exhalation valve for welding/Soldering and Hot/Dusty operations

Diamond Grade™ Conspicuity Rolls

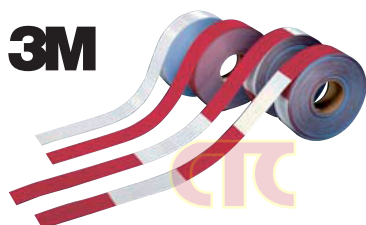

Number	Price ₪	Mfr's	Color	Size
9C50 2871	—	983-10ES WHITE	Solid white	2" X 12" strips
9K40 1115	—	983-32 2" X 50YD	Red/White (Kiss cut)	2" X 18" strips
3M90 4164	—	983-32 RED/WHITE *	Red/White (Alternating pattern)	2" X 50 yds.
3M30 7406	—	983-326ES	Red/White (Alternating pattern)	2" X 50 yds.
3M30 7407	—	983-71 ES YELLOW	Yellow	2" X 50 yds.

* 11" Red X 7" White

Optics package for enhanced visibility. Provides superior reflectivity at wide entrance angles. Provides better reflectivity when applied vertically. 7 year warranty. Aggressive, high tack adhesive alternating 6" red, 6" white, edge sealed on a roll for easy application. Bright white and vivid red for optimum detection, day or night. Meets and exceed federal requirements for conspicuity markings. Yellow tape application : school bus/emergency vehicles.

Diamond grade™ round reflectors meets and exceeds DOT and SAE A requirements for reflectors. Sold in packages of 50.

Number	Price ₪	Mfr's	Color	Size
3M90 4166	—	988 RED	Solid red	3" diameter
3M90 4165	—	988 AMBER	Solid amber	3" diameter

Heavy - Duty, Fast Build up, 600V, UV Rated

Flame-retardant and cold and weather resistant. Resists moisture, alkalis, acids, and corrosion. Thick 8.5 mil for quick buildup and abrasion resistance.



Number 871F 6699
Mfr's 88 3/4 x 66"
Price - ₪