
Fan Accessories

Wire Form Fan Guards SUNON.



For use with tubeaxial fans. Ring spacing design was developed to assist our customers in complying with domestic and international safety agency requirements.


Features

- ► C1010 Basic wire. Weld joints withstand 90 kgs. Minimum separation force.
- ► Eliminates transmission of vibration from the fan to the housing and reduces noise up to 9dB.
- ▶ Fast, Simple and safe screwless mounting and remounting from fans.
- ▶ Labor saving device with less mounting costs through shorter mounting time.
- ▶ Protects the fan against vibrations and thus increases the life.

Metal Finger Guard

Specifications

- ▶ Over wire dia. at but joints : 0.25 mm Max.
- ► United mm. Tolerance: + 0.7 mm.
- ▶ Depth of serrations : 0.4 mm Max.
- ► Thickness of Nickel chrome plating: 0.005µm Min.

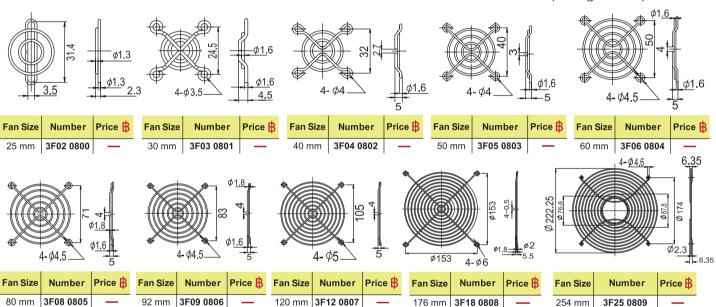


Plastic Fan Guards



Plastic Guard The low cost plastic fan guards, Produced with UL 94-V0. Material are designed for tubeaxial fans with design considerations given

to maximize airflow with reduced noise levels.

Features

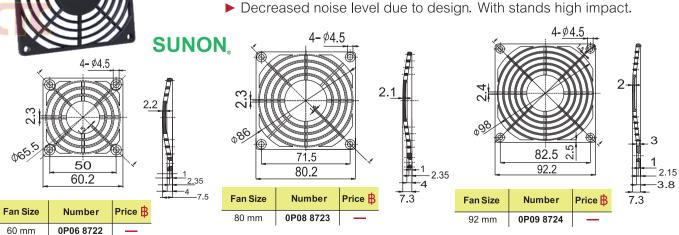

www.component.co.th