



Bolt Retainers



For solid-Arm clamps.
Weld-On bolt retainer at desired
arm length and spindle angle.

Number	Price ฿	Description
2L54 3240	—	10-24 x 1-3/8"
2L54 3242	—	1/4-20 x 1-3/4"
2L54 3244	—	1/4-20 x 2-1/8"

Pull Action Clamps

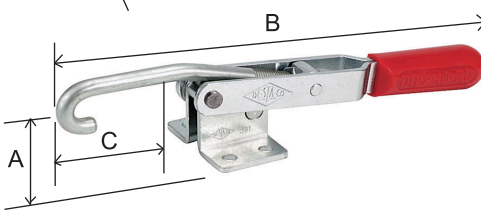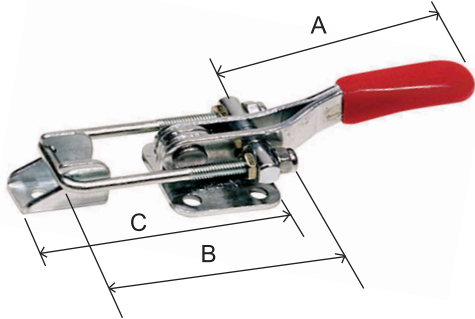

Over - The Center Toggle

Number	Price ฿	Mfr's	A	B	Travel C	Holding Capacity
2C54 0323 *	—	323	1-5/32"	3-15/32"	1-3/16"	360 lbs.
2C54 0331 *	—	331	1-5/8"	5-5/8"	2"	700 lbs.
2C54 0341 *	—	341	3-3/4"	7-1/2"	3-1/2"	2,000 lbs.
2C54 0375	—	375	4"	9-11/16"	3-1/2"	4,000 lbs.
2C54 0385	—	385	3-3/4"	8-5/8"	2-3/16"	7,500 lbs.

Pull Action Latching Clamps

Number	Price ฿	Mfr's	A	B	Travel C	Holding Capacity
2P54 0330	—	330	9/16"	5-11/16"	2-3/8"	200 lbs.
2P54 0351	—	351	3/4"	8-5/8"	4"	375 lbs.
2P54 0381	—	381	1-13/16"	13-1/4"	6-1/8"	1,000 lbs.

* Items supplied with latch plate.

Straight Line Action Clamps

Retractable Locator Straight Line Clamps



Number	Price ฿	Mfr's	A	B	Travel C	Holding Capacity
2H54 0601 *	—	601	1-1/4"	2-7/8"	5/8"	100 lbs.

* Supplied with 8-32 nylon spindle assembly.


Low Silhouette Plunger Clamps

Designed for heavy duty service locks in both extended and retracted position available in metric and inch threads. DE-STA-CO® Toggle lock plus and Pneumatic versions available.

Number	Price ฿	Mfr's	A	B	Travel C	Holding Capacity
2N54 0607	—	607	3-9/32"	4-5/16"	1-5/8"	800 lbs.
2N54 0608	—	608	3-3/8"	5-1/4"	1-5/8"	850 lbs.
2N54 0610	—	610	4-9/16"	6-9/16"	1-5/8"	800 lbs.
2N54 0630	—	630	2-7/8"	7-1/16"	2"	2,500 lbs.
2N54 0640	—	640	4-1/8"	12-11/16"	4"	7,500 lbs.

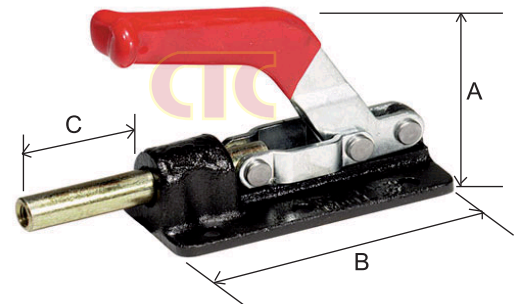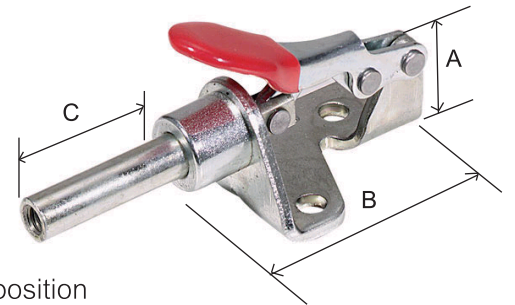

Squeeze Action Clamps

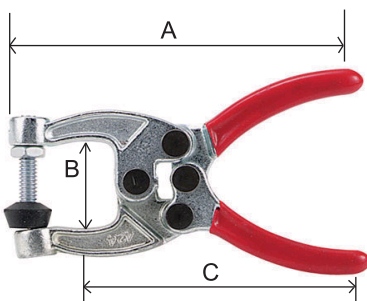

A light duty line of forged alloy steel squeeze action clamps. Supplied with hex head spindle. Available with one or two threaded adjustment spindles in the jaws.

Please Note : Number 2N54 0424 and 2N54 0441 Do not come with two-way trigger release.

Number	Price ฿	Mfr's	A	B	C	Holding Capacity
2N54 0424 *	—	424	4-1/2"	1"	1-1/8"	200 lbs.
2N54 0441 *	—	441	6"	1-1/4"	1-3/4"	350 lbs.
2N54 0462 *	—	462	8-1/2"	1-3/4"	2-3/4"	700 lbs.

* Items supplied with spindle assembly.